



TECHNICAL DATA

Cycle times (*)	60 / 90 / 180 sec. and special cycles
Water consumption	2.0 l/rack
Tank capacity	23 l
Tank heating	2.5 kW
Power supply	400 / 50 / 3N
Booster loading	
Standard	6.2 kW
Total loading	
Standard	7.1 kW 3 x 16 A
Wash pump	0.7 kW
Rack size	500 x 500 mm
Loading height	440 mm
Noise level	65 dB (A)
Weight (gross / net)	121 / 101 kg


CONNECTIONS

① Drain hose	2,000 mm ID 20 / OD 25
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply water temperature	60 °C
Required flow rate	5 l/min
③ Power cord	2,500 mm
Supply hose for	
④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm


PRODUCT ADVANTAGES

- **VAPOSTOP hood system:** prevents exhaust vapour escaping the hood when the hood is opened. The need for an exhaust canopy is removed (check local Council) . No increase in machine height. No additional installation cost or ongoing cleaning
- **DRAIN HEAT RECOVERY:** Transfers heat from the drain water to the incoming cold water to reduce water heating & up to 36% in operating costs
- **VISIOTRONIC Control:** ensures a simple and intuitive operating with a single button. When the display is activated by a proximity sensor, all the necessary information appears in the large display, in clear text or in the form of symbols
- **Exhaust energy storage:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW/h, less humidity in the kitchen area and better hygienic conditions
- **SENSO-ACTIVE Resource Management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result. This reduces the amount of fresh water used per rinse cycle up to 2.0 l
- **Hood-type dishwasher** for straight or corner installation
- Normal capacity up to 60 racks/h
1,080 plates / h or 2,160 glasses / h
- 6 automatic cycles: short, standard, intensive, starch removal, permanent, hygiene
- Heat and noise insulated
- Strainer control sensor
- Refill signal for detergent / rinse aid
- **CLIP-IN Wash and Rinse Arms:** both the wash and rinse arms can be lifted out of the wash chamber and replaced with one hand and without any tools
- **Filter position sensor:** prevents operation without tank strainer
- **GENIUS-X² Fine Filter System:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **EASY-CLEAN Concept:** blue markings in the machine help the operator to identify the components which require cleaning
- Self cleaning program
- USB-Interface for operational data download
- Ready to install - equipped with: fill/drain hoses, electrical cable, detergent & rinse aid dispensers, rinse pump, drain pump, back flow preventer (Watermark approved)
- Tank, frame, wash/rinse arms & panels are 1.4301 stainless steel
- 1 - plate rack P-18-12
- 1 - universal rack B-00-07
- 1 - 8 section cutlery basket CB8

DIMENSIONAL DRAWING

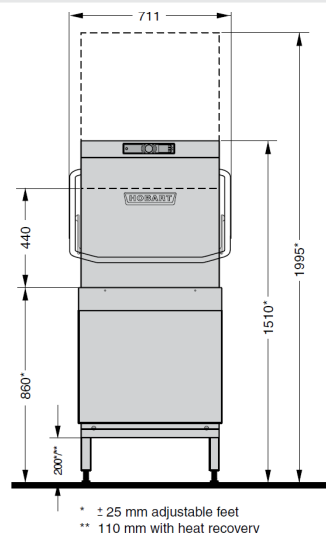

MADE IN GERMANY

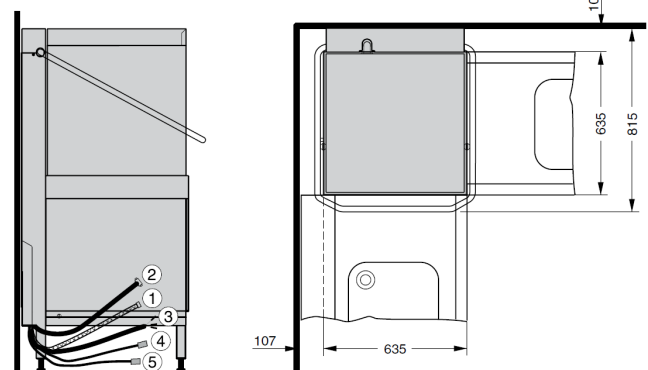

* Thermostop guarantees required rinse temperatures. The actual cycle time extends accordingly if the machine is connected to cold water.

* For corner installations keep the right side of the machine accessible for service.

* For machine protection water hardness should not exceed 3°dH. If higher we recommend using a water softener - ask your Hobart representative for assistance.

* ± 25 mm adjustable feet
** 110 mm with heat recovery