


PROFI rack conveyor dishwasher - 80 / 120 racks / hour

Product Advantages:

- **Heavy-duty "A" wash tank** for maximum wash results
- Stainless steel wash & rinse arms with **patented WIDE ANGLE FAN nozzle** to maximise wash and rinse performance
- Triple rinse for best rinse result low rinse volume - 170 litres / hr
- 2 speeds - 80 / 120 racks / hr
- Heat recovery C20—fill on hot water and then run on cold
- **SMARTRONIC** Single button control ergonomically positioned at the entry of the machine. One button - on, fill, start, stop and drain.
- Optimum hygienic safety by deep drawn tank with covered corners (no welds)
- Stainless steel single piece strainer pan
- Stainless steel wash pump - self draining
- **RINSE PRESSURE PUMP** to guarantee rinse pressure and volume
- **Door insulation** for heat retention & a better work environment

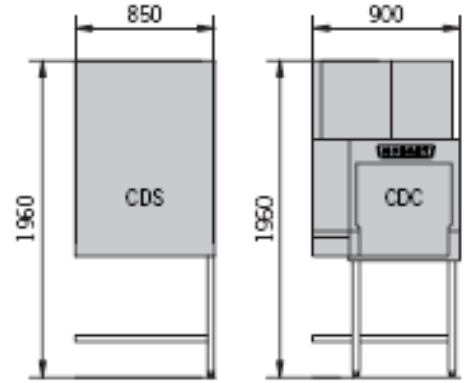

CDS straight dryer section adds 850mm to length of below machine & replaces 300mm exit "hood" as shown.


Dryer – fan 0.5kW / 510m³/hr. Electrically heated – 5.32kW

CDC dryer section over exit curve adds 900mm to length of below machine and replaces 300mm exit "hood"

MADE IN GERMANY

1 fresh water connection, soft	R 3/4" 0 - 3°d, (0,5mmol/l); max. 170 l/h, demineralized water blended to have appr. 80 µs/cm
1.1 hot water connection for separate tank fill (option)	R 3/4" 0 - 7°d; (1,4mmol/l)
2 drain	DN 50
3 power supply (depending on specific model and type of heating)	CN-A - 26.2kW CN-A - with dryer - 31.52kW

④ Ventilation / vent. condition (depending on specific model)	with standard model (incl. C20) appr. 380 m ³ /h, 35°C, 14 g/m ³ humidity
⑤ main switch	

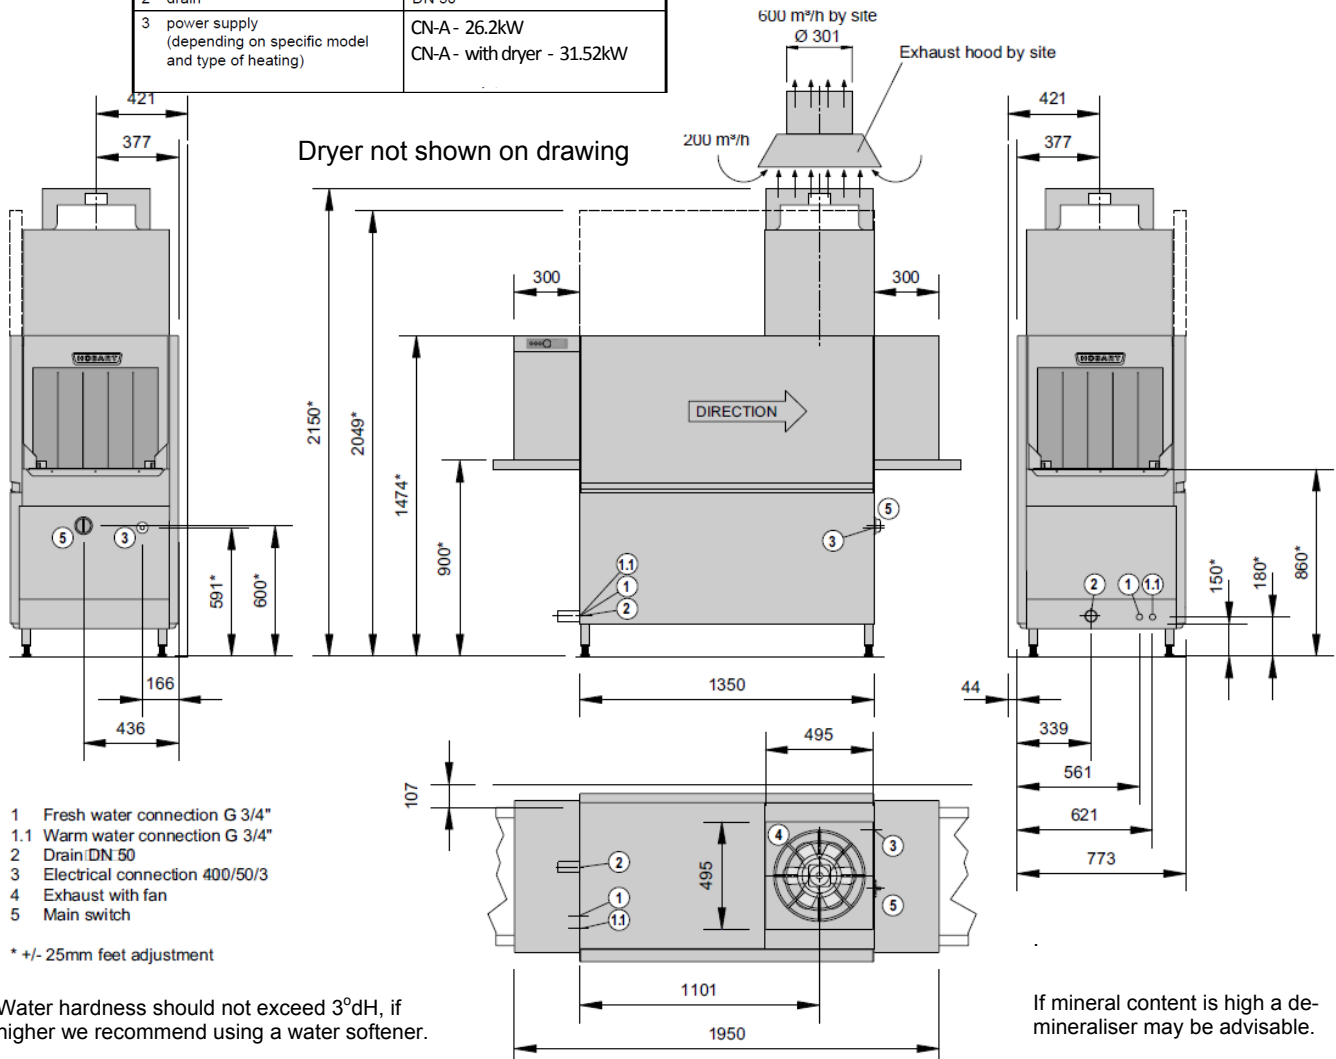

- 1 Fresh water connection G 3/4"
- 1.1 Warm water connection G 3/4"
- 2 Drain: DN 50
- 3 Electrical connection 400/50/3
- 4 Exhaust with fan
- 5 Main switch

* +/- 25mm feet adjustment

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.