


## PROFI rack conveyor dishwasher - 120 / 180 racks / hour

### Advantages:

- High performance **pre-wash "L"**
- **Heavy-duty "A" wash tank** for maximum wash results
- Stainless steel wash & rinse arms with **patented WIDE ANGLE FAN nozzle** to maximise wash and rinse performance
- Triple rinse for best rinse result low rinse volume - 180 litres / hr
- 2 speeds—120 / 180 racks / hr
- Heat recovery C20—fill on hot water and then run on cold
- **SMARTRONIC** Single button control ergonomically positioned at the entry of the machine. One button - on, fill, start, stop and drain.
- Optimum hygienic safety by deep drawn tank with covered corners (no welds)
- Stainless steel single piece strainer pan
- Stainless steel wash pump - self draining
- **RINSE PRESSURE PUMP** to guarantee rinse pressure and volume
- **Door insulation** for heat retention & a better work environment

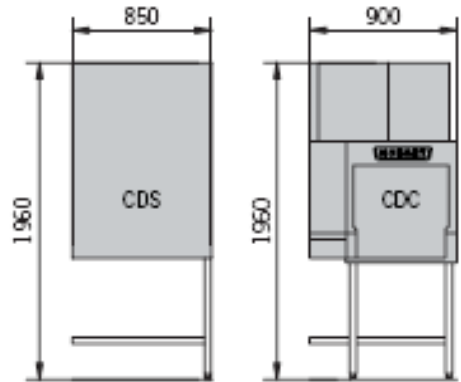

**CDS** straight dryer section adds 850mm to length of below machine & replaces 300mm exit "hood" as shown.

**Dryer** – fan 0.5kW / 510m<sup>3</sup>/hr. Electrically heated – 5.32kW

**CDC** dryer section over exit curve adds 900mm to length of below machine and replaces 300mm exit "hood"

1 fresh water connection, soft	R 3/4" 0-3°d, (0,5mmol/l); Max. 160 l/h; demineralized water Blended to have appr. 80 us/cm
1.1 hot water connection for separate tank fill (option)	R 3/4" 0 - 7°d; (1,4mmol/l)
2 drain	DN 50
3 power supply (depending on specific model and type of heating)	CNLA - 27.7kW CNLA with dryer - 33.02kW

4 Ventilation / vent. condition (depending on specific model)	with standard model (incl. C20) appr. 380 m <sup>3</sup> /h, 35°C, 14 g/m <sup>3</sup> humidity
5 main switch	

## MADE IN GERMANY

