

“Connect & use” glasswasher to suit racks 400x400mm & 17”x14”



Supplied with 150mm legs

Product Advantages:


- **Easy-to-use** electronic controls with 2 cycles - 90 & 120 seconds
- **Re-circulating & low 2.5 litre rinse volume** glasswasher
- Electronic temperature gauges
- Suitable for all glass, cup and light duty washing applications
- Designed to suit racks 400x400mm & 17”x14”
- **Double skinned door** for strength and durability
- Polypropylene wash and stainless steel rinse arm with **patented WIDE ANGLE FAN** nozzle to maximise wash and rinse performance
- Wash pump inlet strainer to ensure machine reliability
- **“Connect & use”**- fill and drain hoses, pump-out drain, chemical dispensers and power lead / plug included for quick and easy installation
- Standard with 150mm stainless steel adjustable legs
- Includes 1 x 17”x14” glass rack,
- Back flow prevention device as standard to meet Watermark Approval and ATS 5200.101
- NOT SUITABLE FOR USE WITH REVERSE OSMOSIS SYSTEMS
- MADE IN GERMANY

Technical Data

flexible drain hose 1000mm	Pump-out drain standard
fresh water connection: pressure hose 1000mm	Connection size: 3/4" BSP
flow pressure	80-600kPa
incoming water temperature	55-65°C
power cord	15amp single phase plug & lead
hose for detergent	Included
hose for rinse aid	
wash tank temperature	55-60°C
rinse water temperature (booster tank)	Minimum 82°C
low temp cut-out (thermostop) activated	Yes
cycle times	90 sec. 120 sec.
water consumption	2.5litres
tank capacity	11litres
tank heating	2.0kW
power supply	240/50/1 - 15amp
booster loading	1.8kW
total loading	2.2kW
pump capacity	250watts
loading height	301mm

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.

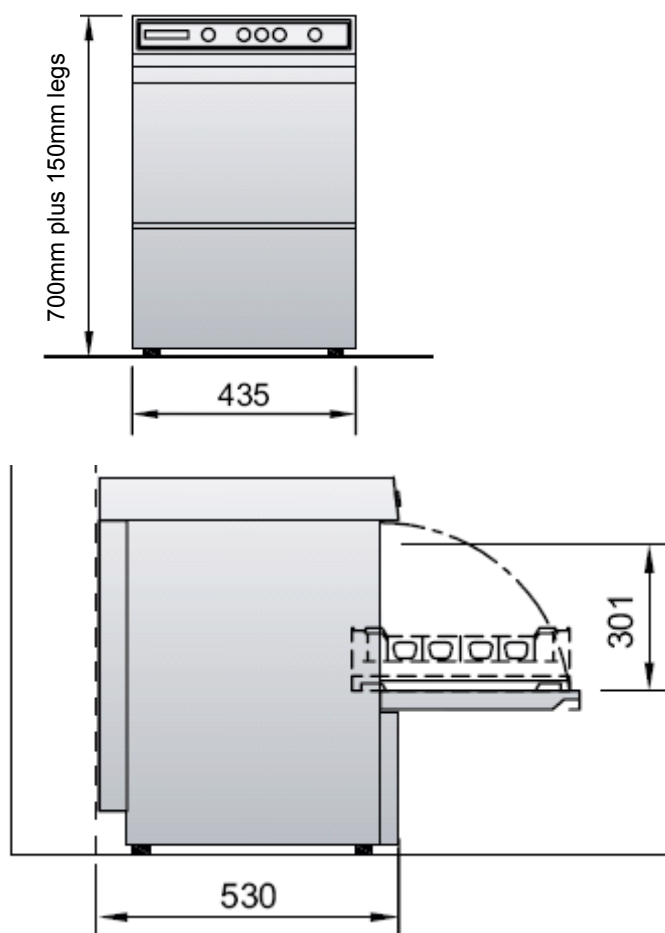

A		Ø 30 mm dia hose
B		Ø 3/4" s/s hose
C		240/50/1